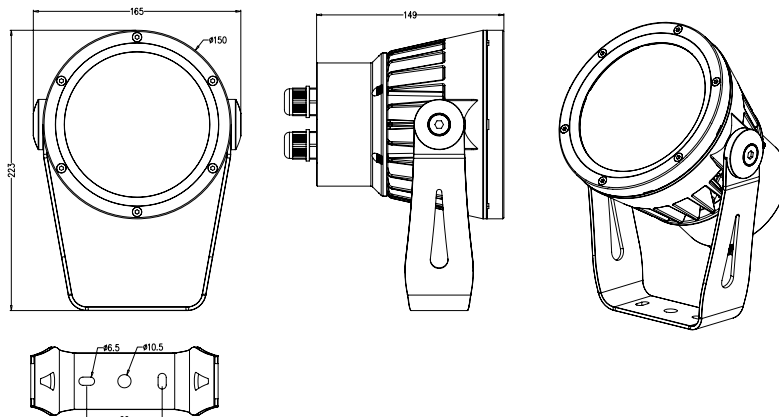





**YK-GS415**

**► SPECIFICATION**




<b>COLOR RANGE</b>	RGBA/RGBW(WW)/RGBW(CW)/RGB/DW/White (White=2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6000K)
<b>SOURCE LIFE</b>	50,000 hours at 70% lumen maintenance at 25degC
<b>LED TYPE</b>	High Power LEDs
<b>LIGHT SOURCE</b>	4pcs
<b>BEAM ANGLE</b>	5deg(only for white) 10deg/25deg/40deg/20x40deg/10x35deg/ 10x60deg/30x60deg available
<b>POWER CONSUMPTION</b>	30W Max.
<b>FLEX LUMINOUS</b>	827lm (RGBW @10deg); 1535lm (4000K @10deg)
<b>CRI</b>	Above 82(can be 92 upon the customized request)
<b>CONNECTION</b>	6-Pin AC/DMX cable in and cable out with IP connectors for daisy chain
<b>CONTROLLED</b>	AC100~240V Input, Integrated PSU & DMX/RDM control & addressed by RDM Tester or DALI dimmable or 0~10 dimmable
<b>LISTING</b>	CE/SAA/C-TICK(RCM)/LM79/TM-21/IP66
<b>IK RATING</b>	IK 07
<b>HOUSING MATERIAL</b>	Die-casting aluminum(black:RAL9005/grey:RAL80147/red:RAL3005)
<b>STORAGE TEMP.</b>	-40degC~+80degC
<b>OPERATING TEMP.</b>	-20degC~+60degC
<b>DIMENSIONS</b>	Dia.165mmx223mm(H) with yoke system
<b>WEIGHT</b>	3Kgs
<b>ACCESSORIES</b>	Half/Full snoot/Crossed louver/Suspension rod(separately ordered)

**► DIMENSIONS**


**DIMENSIONS**




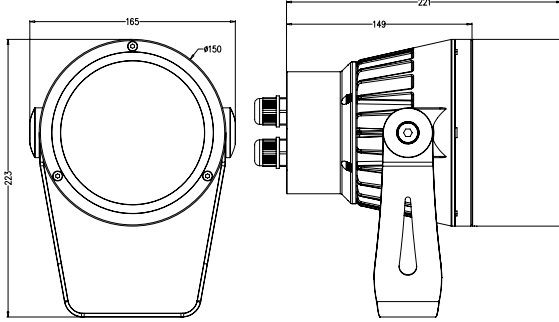


**Full Snoot**

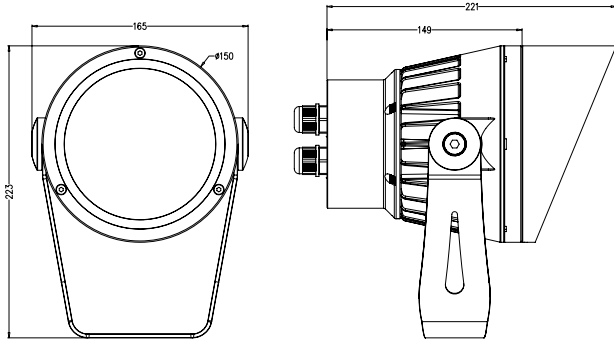

**Half Snoot**

**Crossed Louver**

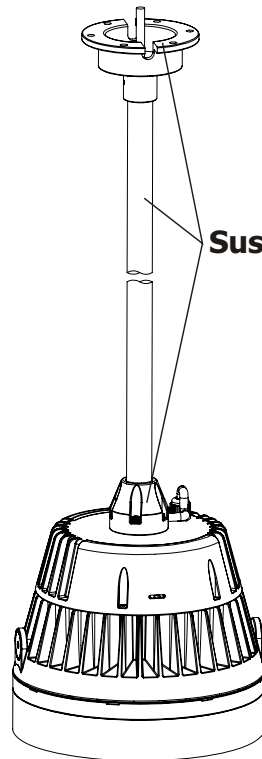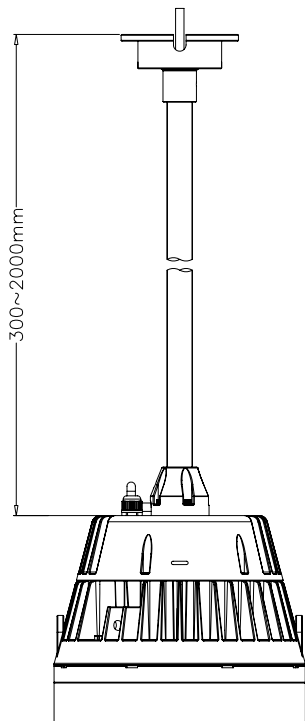

**Suspension Rod System**